


GMP60-TEC56100

60mm planetary gearbox plus 60mm brushless motor

Module	1.0			
Rated torque (kg.cm)	200 kg.cm max			
Max momentary tolerance torque (kg.cm)	400 kg.cm max			
Reduction ratio	1/4	1/13 1/15 1/18	1/47、1/55 1/65、1/77	1/168、1/198 1/234、1/276 1/326
Number of gear stages	1	2	3	4
L (mm)	36	48	59	70


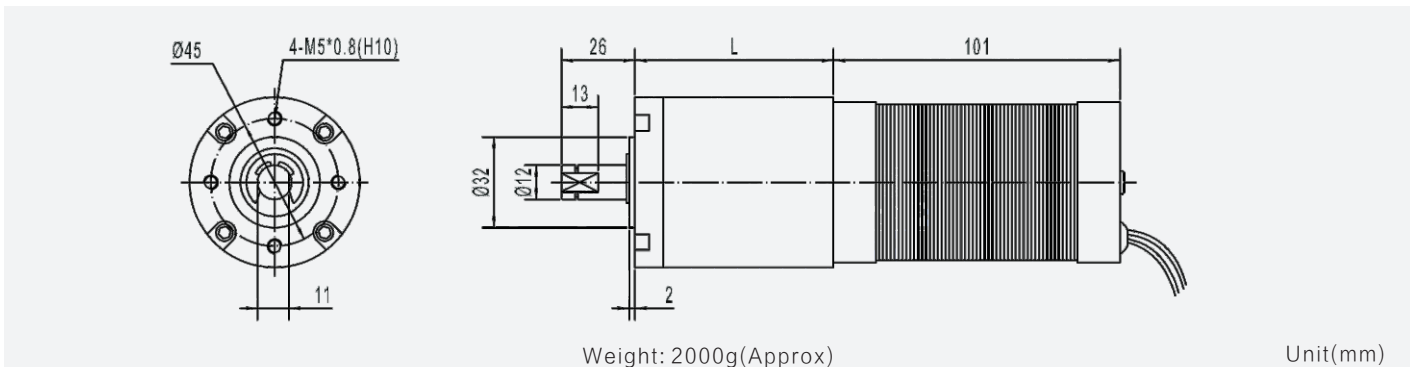


Gear Motor Technical Data

Reduction ratio		4	13	18	47	55	77	168	198	326	
12.0V	No-load speed(rpm)	870	260	190	72	62	45	20	18	11	
	Rated speed(rpm)	760	230	170	65	55	40	18	15	9	
	Rated torque(kg.cm)	1.4	4.2	5.8	14	16	23	47	55	90	
24.0V	No-load speed(rpm)	870	260	190	72	62	45	20	18	11	
	Rated speed(rpm)	760	230	170	65	55	40	18	15	9	
	Rated torque(kg.cm)	1.4	4.2	5.8	14	16	23	47	55	90	

Motor Technical Data

Motor model	Rated voltage	No-load		Rated				Stall	
		Speed	Current	Speed	Torque	Current	Power	Torque	Current
	VDC	r/min	mA	r/min	g.cm	mA	W	g.cm	A
TEC56100-1235	12.0	3500	600	3050	400	1900	12.5	3200	4.5
TEC56100-2435	24.0	3500	300	3050	400	1000	12.5	3200	4.5

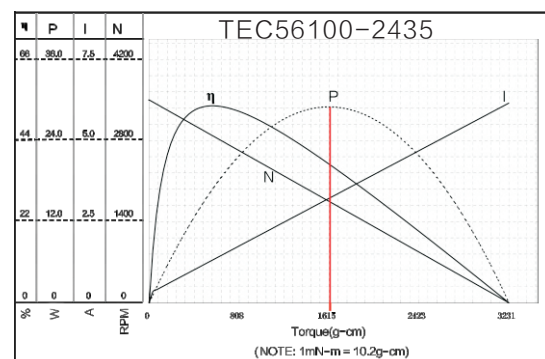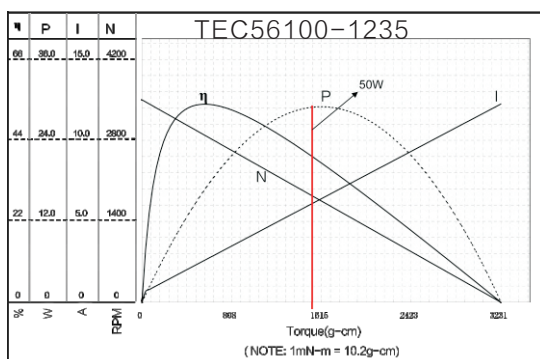

NOTE: the left side of red line area can continuous work